


**APPLICATION**

Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Performance verified up to 600 Mhz

**This cable well exceeds the requirements of ANSI/TIA-568-C.2 category6 ISO 11801 Class E**

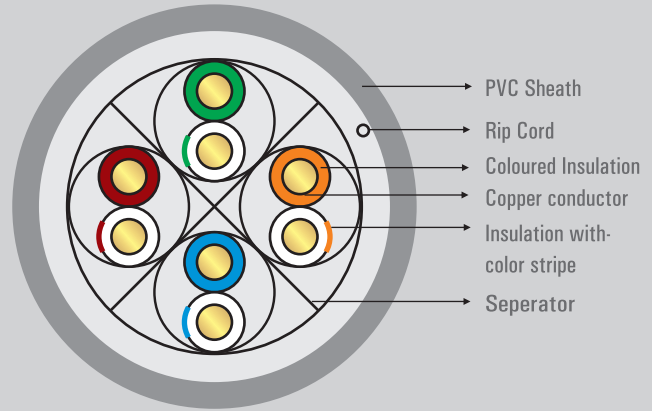

**CONSTRUCTION**

- Conductor: **23 AWG Solid bare Copper (4 pair)**
- Insulation: **High Density Polyethylene**
- Pairs: **2 Insulated conductors twisted together**
- Sheath: **FR-PVC**  
**Insulation thickness 0.2mm nominal**
- Cable Diameter: **6.1 mm nominal**
- Cable wt per Box: **13.6 Kgs nominal**
- Printing: **Each meter printed with sequential Length Counter**

◆ **ELECTRICAL PROPERTIES**

- Characteristic Impedance: **100 ± 15Ω**
- Conductor Resistance: **≤ 9.38 Ω /100m**
- Insulation Resistance: **100M Ω**
- Mutual Capacitance: **< 5.6nF/100m**
- Resistance Unbalance: **5% Max**
- Capacitance Unbalance: **330pF/100m**
- Delay Skew: **< 45nS**
- NVP (%): **69%**
- Operating Voltage: **72V**
- Dielectric Strength: **1.0KV dc or 0.75KV ac for 1min**

◆ **COLOR CODE**

PAIR NO	COLOR	PAIR NO	COLOR
1-2	White-Orange Stripe and Orange	3-6	White-Green Stripe and Green
4-5	White-Blue Stripe and Blue	7-8	White-Brown Stripe and Brown

✦ **TRANSMISSION CHARACTERISTICS PER 100M**

Frequency MHz	Insertion Loss (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	ACR (dB)	PSACR (dB)
1	2.0	20.0	74.3	72.3	67.8	64.8	72.3	70.3
4	3.8	23.0	65.3	63.3	55.8	52.8	61.5	59.5
8	5.3	24.5	60.8	58.8	49.7	46.7	55.5	53.5
10	6.0	25.0	59.3	57.3	47.8	44.8	53.3	51.3
16	7.6	25.0	56.2	54.2	43.7	40.7	48.6	46.6
20	8.5	25.0	54.8	52.8	41.8	38.8	46.3	44.3
25	9.5	24.3	53.3	51.3	39.8	36.8	43.8	41.8
31.25	10.7	23.6	51.9	49.9	37.9	34.9	41.2	39.2
62.5	15.4	21.5	47.4	45.4	31.9	28.9	32.0	30.0
100	19.8	20.1	44.3	42.3	27.8	24.8	24.5	22.5
200	29.0	18.0	39.8	37.8	21.8	18.8	10.8	8.8
250	32.8	17.3	38.3	36.3	19.8	16.8	5.5	3.5
500	45.3	15.2	33.8	31.8	13.8	10.8	4.5	2.8
600	51	14.5	31.2	29.9	11.8	8.6	3.5	2.1

✦ **MECHANICAL PROPERTIES**

Bending Radius: < 25.4mm at -20°C ± 1°C  
 Pulling Force: 11.5 Kg  
 Operating Temperature Range: -20°C to +70°C  
 Storage Temperature Range: 0°C to +50°C

✦ **ORDERING INFORMATION**

Part Code	Description
NCB-C6UGRYR-100	CAT6 UTP 23AWG Solid: 100M

✦ **CONNECTION SYSTEM**

Compatible with all common systems according to TIA/EIA 568-C.2 and ISO/IEC 11801 Class E

✦ **PACKING**

Reels of guaranteed 100m Length