


D-Link RG-59 double-shield coaxial cable offers superior Electrical performance meeting all requirements of CATV, DTH, Broadband and Computer Network applications.

Feature and Benefits:

- Can be used for Outdoor installation
- 20 AWG (0.80 mm) Centre conductor

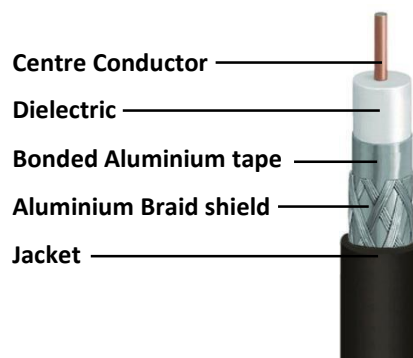

CONSTRUCTION	
Conductor:	
Conductor Type	Copper Clad Steel (CCS)
Nominal Conductor Diameter	20 AWG (0.80 mm)
Dielectric:	
Dielectric type	Gas Expanded Foam PE
Shielding:	
1st Shield	Aluminium tape bonded to dielectric
2nd Shield	Aluminium braid wire
Jacketing:	
Outer Sheath material	PVC- Black
Nominal thickness	0.70 mm
Approximate Cable OD	5.2 mm

ELECTRICAL PARAMETERS	
Impedance	75 ± 3 Ω
Typical Attenuation at 20° C (dB/100m)	
55 MHz	6.02
211 MHz	11.83
300 MHz	14.19
400 MHz	16.64
500 MHz	18.45
600 MHz	20.24

ORDERING INFORMATION	
Part code	Description
DCS-RG59CCS-BLKR-90	RG59 CCS Coaxial Cable 90m
DCS-RG59CCS-BLKR-305	RG59 CCS Coaxial Cable 305m